


RWWD19 MAXIMUS Straight Radiator

Softwall radiator hose recommended for conveying hot water and anti-freeze, etc in cooling systems, used in automobiles. Resistant to heat and ageing.

Tube:	Black, heat resistant synthetic EPDM rubber compound
Cover:	Black, smooth wrapped finish EPDM rubber compound
Reinforcement:	High strength synthetic cord
Temperature:	-20°C to +120°C
Branding:	

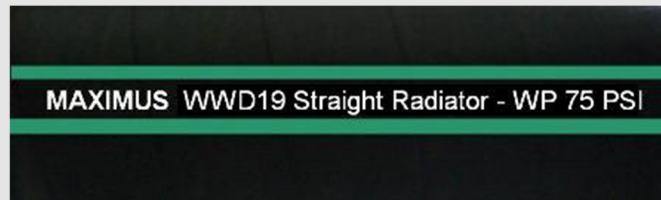

Size	ID mm	OD mm	WP psi	BP psi	Weight (kg/metre)
19	19.1	26	75	225	0.35
22	22.2	32	75	225	0.38
25	25.4	34	75	225	0.47
28	28.1	38	75	225	0.49
32	32.1	42	75	225	0.52
35	33.3	45	75	225	0.57
38	38.1	48	75	225	0.61
41	41.3	52	75	225	0.82
45	44.5	55	75	225	0.83
48	47.6	59	75	225	1.05
51	50.8	62	75	225	1.11
54	53.9	64	75	225	1.19
57	57.1	67	75	225	1.26
60	60.3	71	75	225	1.29
63	63.5	74	75	225	1.33
67	66.7	78	75	225	1.43
70	69.9	80	75	225	1.50
73	73.0	82	75	225	1.60
76	76.1	86	75	225	1.68
80	82.6	90	75	225	2.13
90	88.9	100	75	225	2.18
102	101.6	116	75	225	2.22
127	127.0	142	75	225	3.40
152	152.4	167	75	225	4.55

DS-RWWD19

REV: OCTOBER 2020