


# Product information

## CHDP5051 - Danoil 9 SG Petroleum Hose

Rail car loading and unloading, road tanker bottom loading, lubricating oil plant hose exchanges. The Heavy Duty is designed for ship to shore and on board marine transfer, and with the Nylon lining, this hose is especially suited for use with MTBE, unleaded fuels and other high aromatics, solvents and lubricants.

Not recommended for corrosive or aggressive chemicals.

<b>Tube:</b>	Multiple layers of polyamide fabrics.
<b>Cover:</b>	Blue PVC coated polyester fabric with white layline
<b>Reinforcement:</b>	Fabric: Polypropylene Inner Wire: Galvanised Steel Outer Wire: Stainless Steel 316
<b>Temperature:</b>	-30°C to +80°C
<b>Conforming Standards:</b>	BS EN 13765: Type 3 Heavy duty hose meets International Maritime Organisation IBC Code US Coastguard requirements
<b>Branding:</b>	

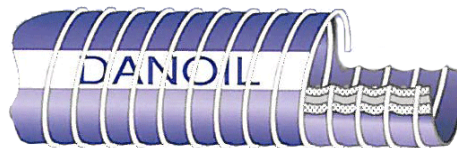

Size	ID mm	WP Kpa	BP Kpa	B Rad mm	Weight Kg/mtr
50	50.8	1400	5600	180	1.9
65	63.5	1400	5600	205	2.5
80	76.1	1400	5600	280	3.0
100	101.6	1400	7000	405	6.4
150	152.4	1400	7000	510	10.7
200	203.2	1400	7000	760	15.0
250	254.0	1050	5250	915	20.5