


PHMS13 Superflex 2

For suction and delivery of waters, mud, grains, and other materials used in industrial and agricultural markets.

Offers high flexibility at low temperatures.

Tube:	Black, smooth PVC/NBR compound
Cover:	Black, slightly corrugated PVC compound
Reinforcement:	Anti-shock grey rigid PVC helix
Temperature:	-40°C to +60°C

Branding:

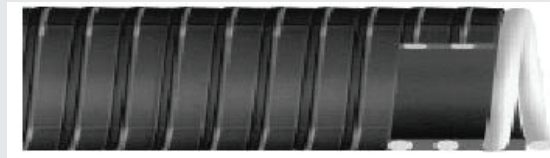

Size	ID mm	OD mm	WP psi	BP psi	Vacuum %	Weight Kg/mtr
51	50.8	60.1	30	150	70	1.00
63	63.5	73.9	25	125	70	1.40
76	76.1	87.0	25	125	70	1.70
102	101.6	114.7	20	100	60	2.70
152	152.4	168.8	12	60	60	5.00

DS-PHMS13

ISSUED: MAR 2015

REV: MAY 2019

1300 BATSALES sales@batind.com.au
1300 228 725

visit our website www.batind.com.au