

## REWD10 MAXIMUS Hot Wash

Softwall washdown hose for use with cold and hot water to 120°C, paper mills, dairies, food handling or processing plants requiring a non-marking cover. Not for use with pure steam.


**Tube:** White, extruded EPDM FDA rubber compound

**Cover:** Extruded EPDM rubber compound

**Reinforcement:** High strength synthetic cord

**Temperature:** -40°C to +120°C

**Branding:**

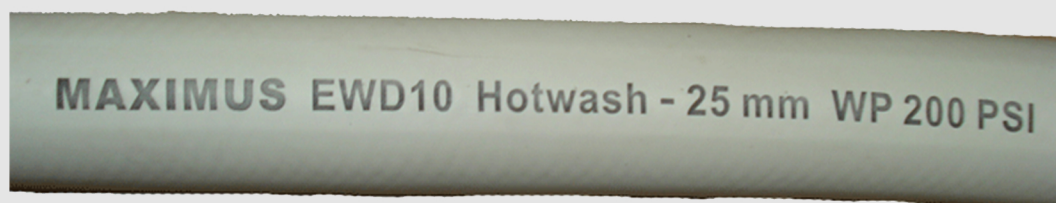

Size	ID mm	OD mm	WP psi	BP psi	B Rad mm	Weight Kg/mtr
12	12.7	23	200	800	127	0.43
19	19.1	32	200	800	152	0.72
25	25.4	39	200	800	203	0.98