


Puremix Z6

High Flow Inline Undersink Filter System

MAINS WATER

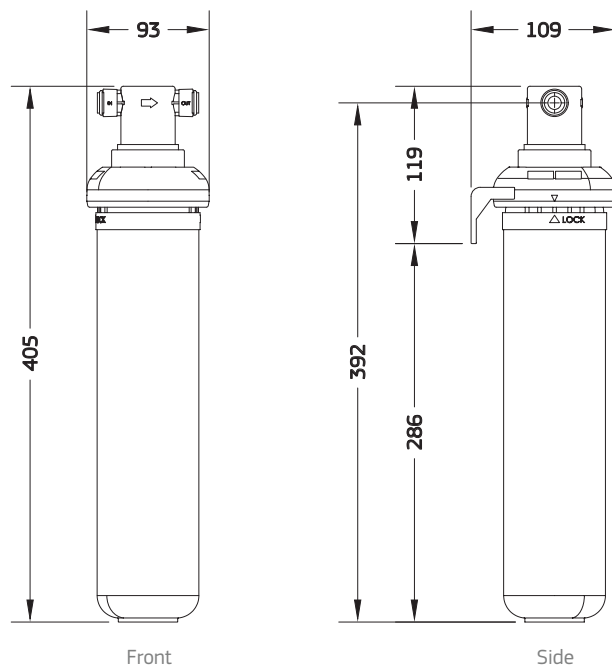

Note: All dimensions are in mm.

Parts Included



Specifications

Ordering Code	Temp °C	Pressure** (kPa)	Flow (Lpm)	Micron Rating*	Connection	Cartridge Size	Capacity*** (L)
PureMix Z6	0-38	200-520	9.5 Lpm @420kPa	0.1	1/2" BSP (15 mm)	15"	60,000
PVM65PH	40	50-500	5	-	3/8" QC tube	100x40mm	

Notes:

Specifically designed for mains water supply. Connects to any mixer tap. Unit can be installed vertically or horizontally. Protect from freezing.

Replacement Cartridge: Z6-R. QC = Quick Connect.

PVM65PH = Multivalve, Pressure Limiting / Dual Check Valve. Max. Pressure: 1600 kPa.

APPROXIMATE SPACE REQUIRED

Vertical Mount : 500 mm (h) x 215 mm (w)	Horizontal Mount : 215 mm (h) x 500 mm (w)
--	--

PUREMIX-Z6 FILTRATION TECHNOLOGY

STAGE 1	<ul style="list-style-type: none"> Removes particles Clarifies the water Removes sediment, rust, sand, silt and algae
STAGE 2	<ul style="list-style-type: none"> Chlorine and chloramine reduction Eliminates bad taste and odours Chemical pesticides and sulphur reduction
STAGE 3	<ul style="list-style-type: none"> Ultra Z Filtration membrane finely filters to 0.1 micron* Provides protection against cysts and bacteria, such as E. coli Removes the finest particles

Warranty:

Use only genuine Puretec replacement cartridge. 10 year warranty* is 1 year parts and labour, 9 years parts only.



Warning: Please visit www.puretec.com.au/instructions to observe essential manufacturer's instructions before use. Note: No claims can be made based on the specifications and images in this document. The design, technology, colours, features and prices are subject to change. This document and all its contents are copyright protected. All rights are reserved, particularly alteration, translation and reproduction using electronic systems. This spec sheet has been designed to help make product selection easy. However due to the complex nature of water chemistry, we strongly encourage confirming any product selection with one of our team. We may need to perform a water analysis test to confirm contaminants in water. Caution: Do not use with microbiologically unsafe water or water of unknown quality without adequate disinfection before or after the system. Warranty: *Warranties in this document cover parts for the period stated and include cover for parts and labour for the first year where applicable, subject to approval. Excludes consumables. Our Water Filtration Specialists can provide you with advice to suit your needs. **Where line pressure exceeds 520kPa, an approved pressure limiting device must be installed to comply with Australian & New Zealand Plumbing Standards. (Ref. AS 35001:2021, Clause 3.3.4). Maximum flow depends on cartridges, vessel, pressure, impurities etc. *Micron rating is nominal. ***Capacity is based on inlet chlorine @2ppm ±10%. The term 'removal', 'eliminate' and 'protection' indicates significant reduction, not necessarily 100% removal.

OCT 2024

For more information contact your local stockist or visit us at puretecgroupp.com
Australia **1300 140 140** | New Zealand **0800 130 140**

