



PUMPS AUSTRALIA

BETTER • FASTER • EASIER




## VARIABLE SPEED MULTISTAGE PUMP

### TECHNICAL DATA

**MODELS:** VSRE40-60 | 38-110 | 52-110 | 67-120 | 50-175 | 65-175 | 46-350

**CODE:** 21620 | 21637 | 21644 | 21651 | 21668 | 21675 | 21682

# CHARACTERISTIC CURVE & PERFORMANCE DATA

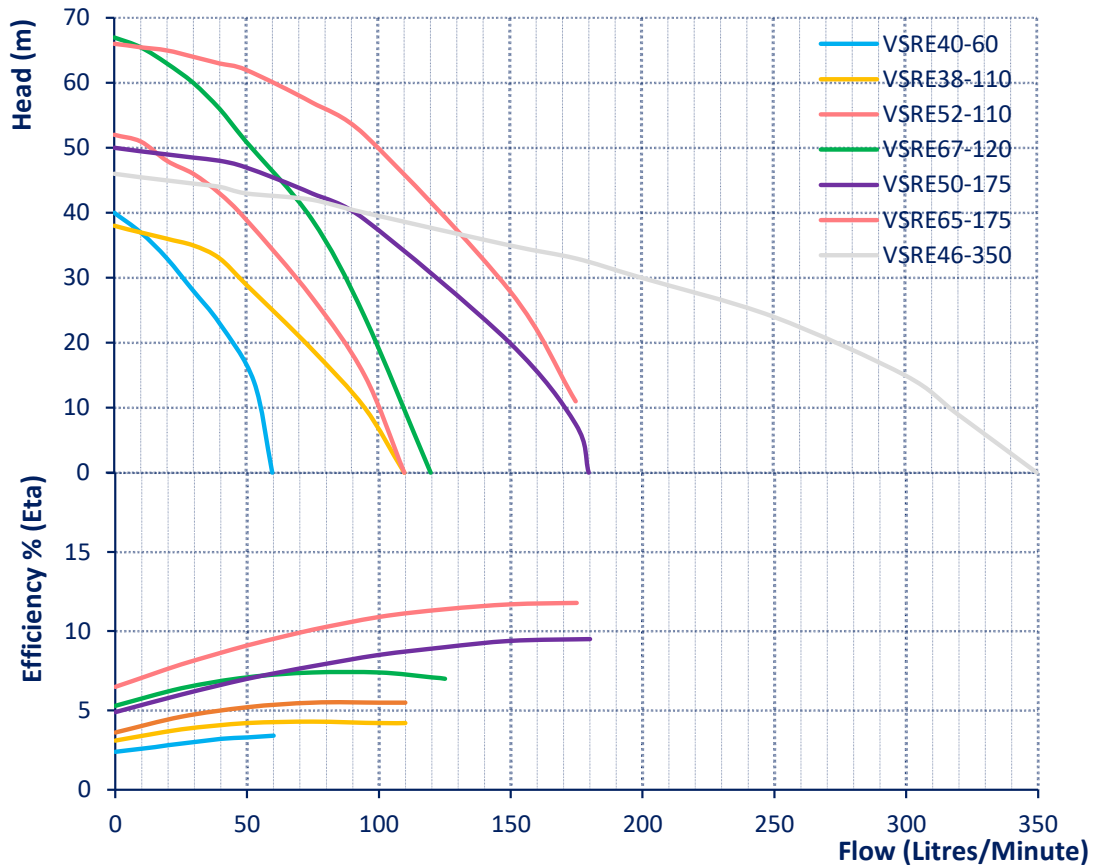


MULTISTAGE PRESSURE PUMP

TYPE	Nominal Power (P2)		Input Power (P1)	Capacitor	Input Current						
	W	HP				W	μF	240V	L/MIN	0	50
Single Phase						HEAD (M)					
						NPSH (M)					
						HEAD (M)					
						NPSH (M)					
						HEAD (M)					
						NPSH (M)					
						HEAD (M)					
						NPSH (M)					
						HEAD (M)					
						NPSH (M)					

**NOTE:** Efficiency Percentage (%) refers to the percentage of power consumed by the motor during operation. This calculation is taken from the P1 Power.

Ascento Group reserves the right to make changes without prior notice

# DIMENSIONS & WEIGHT

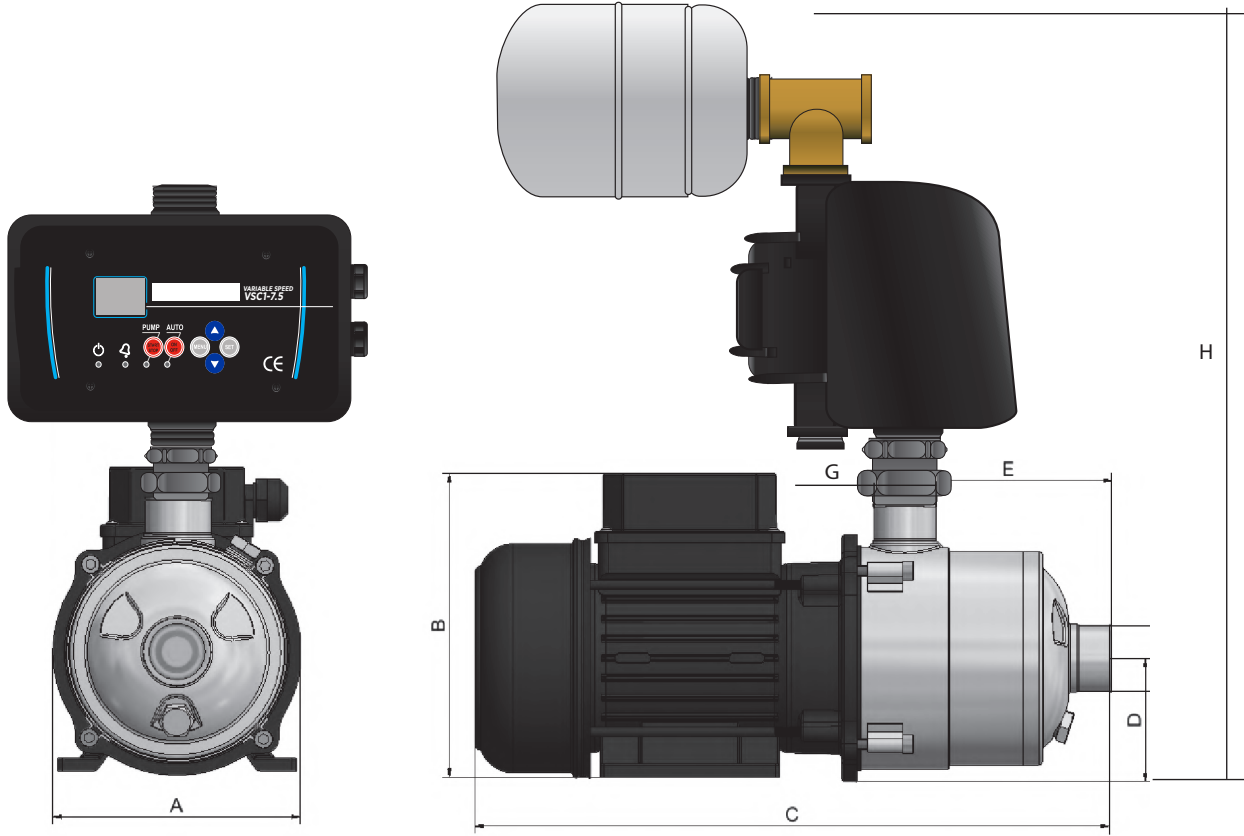

MULTISTAGE PRESSURE PUMP

MODEL	DIMENSIONS (MM)						PACKING (PUMP ONLY) (MM)				WEIGHT (KG)	
	A	B	C	D	E	F	G	H	L	W		H
VSRE40-60	126	160	357	63	115	1"	1"	430	362	131	165	6.0
VSRE38-110	155	179	353	71	107	1"	1"	450	358	160	184	9.3
VSRE52-110	155	179	372	71	127	1"	1"	450	377	160	184	9.8
VSRE67-120	155	179	390	71	146	1"	1"	450	395	160	184	10.5
VSRE50-175	191	212	436	80	150	1¼"	1¼"	482	441	196	217	12.7
VSRE65-175	191	212	436	80	170	1¼"	1¼"	482	441	196	217	14.4
VSRE46-350	193	212	500	80	215	2"	1½"	482	505	198	217	16.5

Ascento Group reserves the right to make changes without prior notice