

Receiver
From

 Society
 Reference
 Address
 Phone
 Fax
 E-mail

Item n° :

504200450

Model :

S4B-32

Pump data

Pressure rating :

Min. fluid temperature : 0 °C

Max. fluid temperature : 40 °C

Max. Temperature operating :

Requested data

Flow : 0 m³/h

Head : 0 m

Fluid : Water, pure

Fluid Temperature : 20 °C

Density : 998.3 kg/m³

Kinematic viscosity : 1.005 mm²/s

Vapor pressure : 100 kPa

Hydraulic data (duty point)

Flow :

Head :

Materials

Lower support	AISI 304 micro use
Impeller	Technopolymer A / AISI 304
Diff user	Technopolymer A
Impeller Lock nut	Stainless steel
Cable cover	AISI 304 X5 Cr Ni 1810 UNI 6900/71
Shaft with rotor	AISI 304 X5 Cr Ni 1810 UNI 6900/71
Filter	Stainless steel

Motor data

Motor brand :

Nominal power P2:



Rated voltage :

Nominal current :

Number of poles :

Rated speed :

Degree of protection :

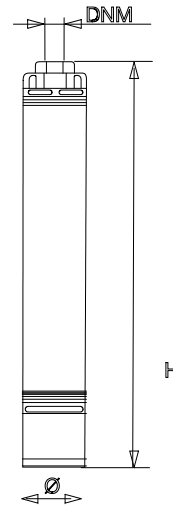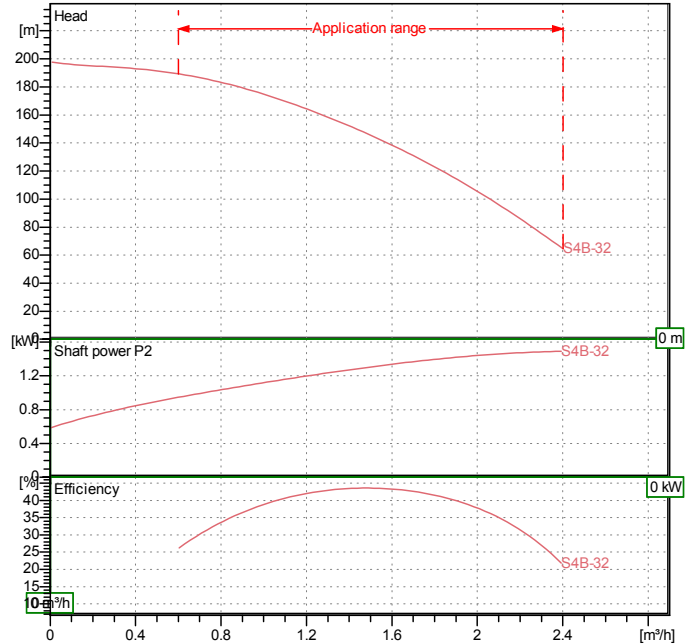Curve tolerance according to ISO 9906

Weight : 7 kg

Dimensions in mm

DNM	1"1/4 G-F				
H	902				
Ø	97				

Pump connection

 Suction side /
 Discharge side 1" 1/4 G-F / --



PERFORMANCE CURVES

12/12/2014


Page 2 / 3

DAB PUMPS S.p.A.
Via Marco Polo, 14 - 35035 Mestrino (PD), Italy
Tel. +39 049 5125000 - Fax +39 049 5125950
www.dabpumps.com

Society Reference Address Phone Fax E-mail	Receiver	From

S4B-32

Curve tolerance according to ISO 9906

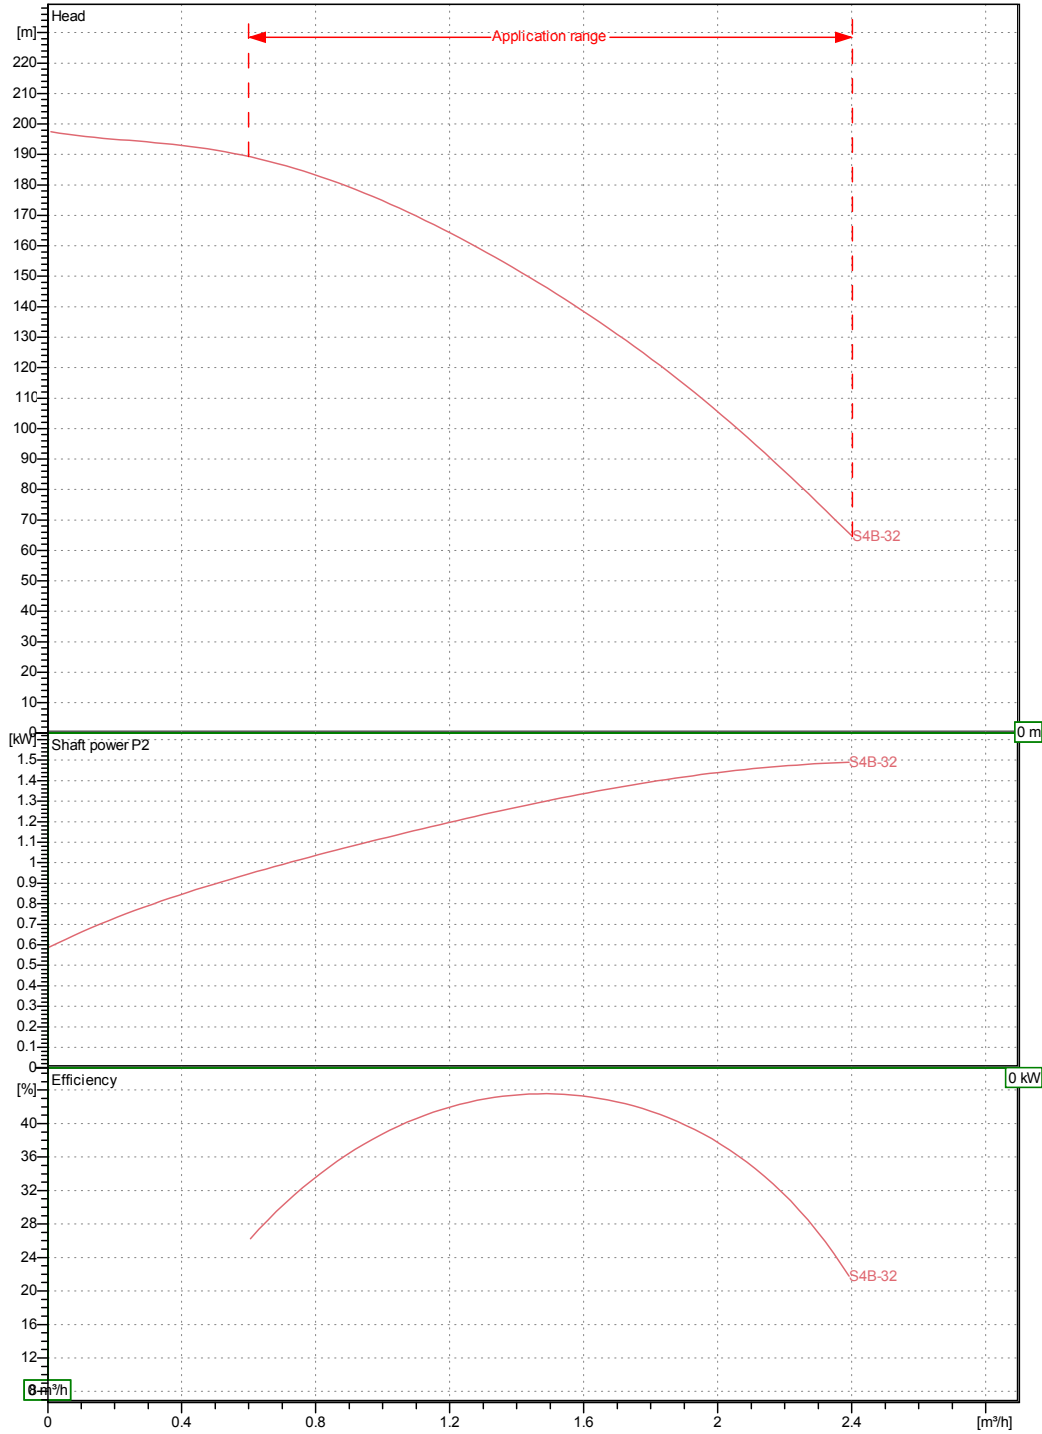

Hydraulic data (duty point)

Suction side	Discharge side 1 " 1/4 G-F	Flow : 0 m³/h	Head : 0 m	Rated speed :
Project	Project ID	Created by	Created on	12/12/2014



WATER • TECHNOLOGY

DIMENSIONAL DRAWING

12/12/2014

Page 3 / 3


DAB PUMPS S.p.A.
Via Marco Polo, 14 - 35035 Mestrino (PD), Italy
Tel. +39 049 5125000 - Fax +39 049 5125950
www.dabpumps.com

Receiver

From

Society
Reference
Address
Phone
Fax
E-mail

S4B-32

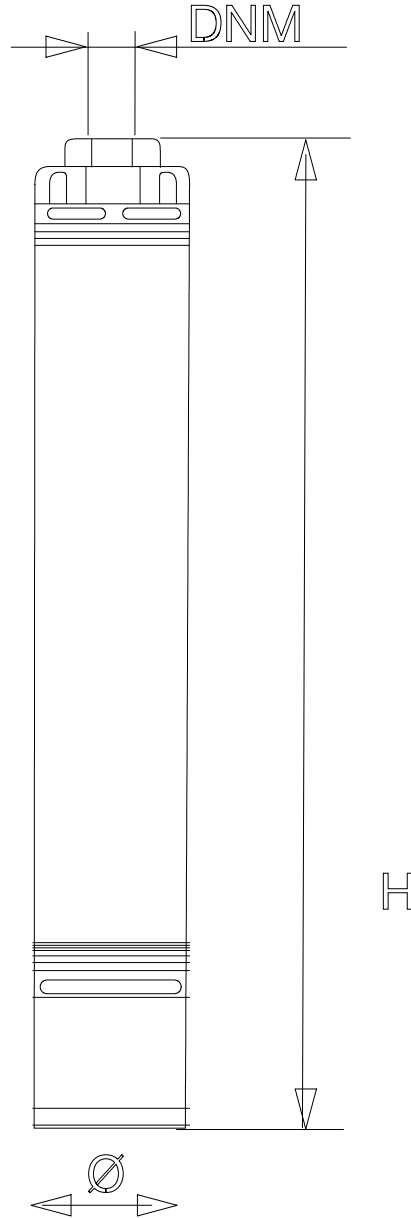

Dimensions in mm

Item	Symbol	Value	Unit	Notes
1	DNM	1"1/4 G-F		
2	H	902		
3	Ø	97		

Pump connection

Suction

Discharge
1 " 1/4 G-F
-

Project

Project ID

Created by

Created on

12/12/2014